


NOX CPA-M G3 • N266-G3

Control panel with LCD screen and card reader

Control panel for the NOX system, with 128 x 64 pixel LCD graphical display, white backlight, integrated alarm buzzer, numeric keypad with “clear = C” and “enter = E” buttons, two scroll keys with variable functions, 4 freely programmable status diodes and card reader.

NOX CPA-M G3 specifications

- Graphical control panel in PVC plastic
- Car reader supports the following:
 - Mifare 1k
 - Mifare 4k
 - UltraLight
 - DesFire
 - NFC NTAG203
- For surface mount
(Can be countersunk with N258 / N308)
- 128 x 64 pixel matrix display,
7 lines with 21 signs each.
- Company logo on display.
- White LED backlight
- Freely programmable internal buzzer.
- 4 freely programmable status diodes.
- Supports multiple languages

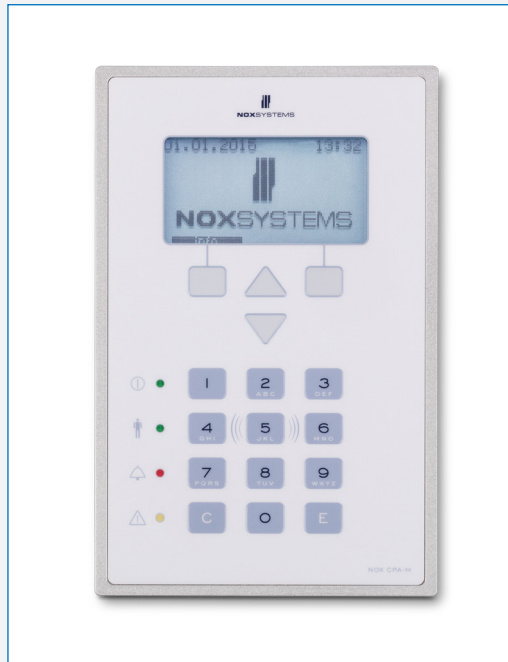

Terminal connections

Terminal P2	+	-	A	B
Pin	8-16 VDC	GND	Bus A	Bus B
Description	Supply voltage (VBUS)		Bus connection	

Technical Data

	Unit	Min.	Nominal	Max.
Supply voltage (VBUS)	VDC	8.0	15.0	16.0
Current consumption @ 15VDC	mA	39 ¹		64 ²
Current consumption @ 9VDC	mA	61 ³		102 ⁴
Operating temperature	°C	0	25	40
Air humidity @ 40 ° C (non condensing)	% RH			93
Card reader distance (depends on type of card)	mm			30
Dimensions	mm	177 x 115 x 25		
Degree of protection - IEC 60529:2001		IP20		

1) og 3) = Without backlight, buzzer, and LEDs

2) og 4) = With backlight, buzzer, and LEDs

